



LED Beacon SOLISTA LX Wall




The Solista LX Wall product takes its slim line design cues from the popular Solista Maxi. Available in a red or white body colour and with a shallow or deep base, the Solista LX Wall is suitable for a variety of applications. The Solista LX Wall has a unique lens design that distributes light to achieve the required illumination, whilst using minimum current.

- Ultra low current consumption
- Up to 7.5m room coverage
- 0.5Hz or 1Hz Flash rate
- Coverage switch to 2.5m

Benefits

- Use where current consumption is a key consideration
- Ideal for bedrooms, bathrooms and toilets
- Switch flash rate to 0.5Hz to reduce current consumption
- Reduces power consumption by up to 50%

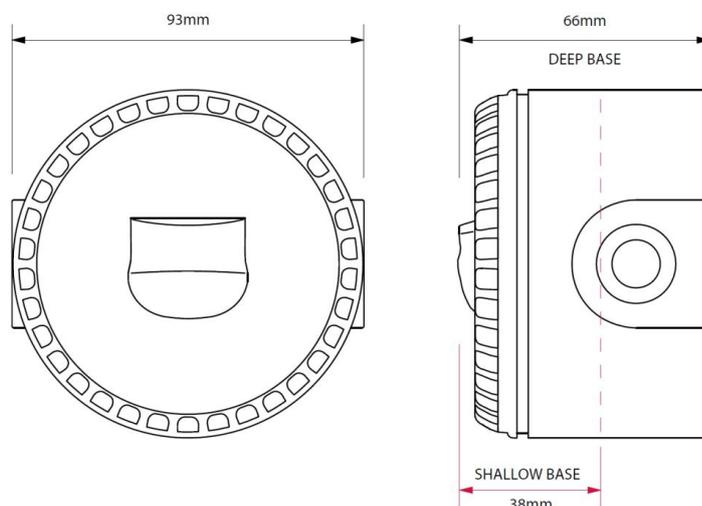

■ Technical Specifications

Mounting Type	Wall
Voltage	9 – 60V _{DC}
Current	10 – 25mA dependent on setting
Coverage (y)	7.5m (Switchable to 2.5m)
Mounting Height (x)	2.4m (max)
Coverage Volume Code	W-2.4-7.5
Coverage Volume	135m ³ (15m ³)
Flash Rate	1Hz (Switchable to 0.5Hz)
Operating Temperature	-25°C ... +70°C
Monitoring	Reverse Polarity
Protection	IP33C Shallow Base and IP65 Deep Base
Weight	100g

■ Ordering Information

Type	Art.-No.	Description	Weight
SOLISTA-LX-W-R	S54539-Z285-A100	Beacon, wall, red	100g
SOLISTA-LX-W-W	S54539-Z285-A200	Beacon, wall, white	100g

The information in this document includes general descriptions of the technical possibilities, which need not be installed in each individual case. The desired performance characteristics must therefore be specified for the individual case when the contract is concluded.

© Siemens Building Technologies • Edition: 15.04.2014

Global Security Products from Siemens
 Siemens AB
 Infrastructure & Cities Sector
 Building Technologies Division
 Security Products
 Englundavägen 7
 Box 1275
 17124 Solna
 Sweden
 Tel: +46 8 629 0300
 Fax: +46 8 627 0096
www.siemens.com/securityproducts